

# WOODS

## SNOW BLOWERS



Make quick work of moving all types  
of snow – powder, crusted, icy or wet



Tractor ranges: 15–175 hp

Available in six working widths from 54- to 108-inches

Two-stage design gives you more throwing force with less horsepower



SB84C

### Standard Duty

#### Models

- SB54S** Tractor range: 15–25 hp
- SB64S** Tractor range: 15–35 hp
- SB74C** Tractor range: 30–50 hp
- SB84C** Tractor range: 35–60 hp


- Three-point hitch: Cat 1 on SB54S and SB64S, Cat 1 and 2 on SB74C and SB84C (all models are ASAE quick-hitch compatible)
- Designed specifically for subcompact and compact tractors
- Move large amounts of snow in a short time with working widths from 54- to 84-inches
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design
- Reinforced steel side plates offer exceptional durability
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator

### Heavy Duty

#### Models

- SS84-2** Tractor range: 60–80 hp
- SS96-2** Tractor range: 80–150 hp
- SS108-2** Tractor range: 125–175 hp

- Three-point hitch: Cat 2 and 3
- These heavy-duty snow blowers have plenty of room to tackle the big storms with working widths from 84- to 108-inches, and up to a 38-inch working height
- Adjustments are a breeze with the 200-degree hydraulic chute rotation (standard on every SS model)
- Ensure faster, easier and safer hook-ups with ASAE quick-hitch compatibility
- Double your snow throwing power with two feeder augers on the SS96-2 and SS108-2 models

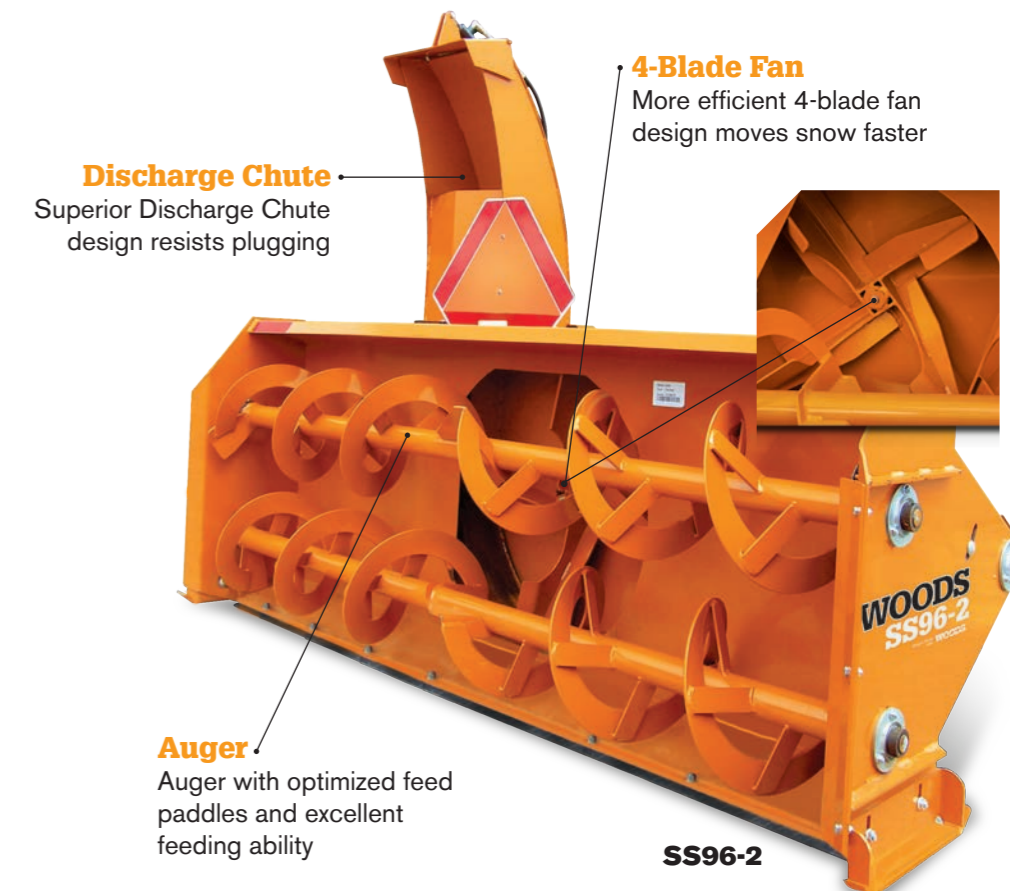

SS96-2



Tractor ranges: 15–175 hp

Available in six working widths from 54- to 108-inches

Two-stage design gives you more throwing force with less horsepower



SB84C

### Standard Duty


- Models**
- SB54S** Tractor range: 15–25 hp
  - SB64S** Tractor range: 15–35 hp
  - SB74C** Tractor range: 30–50 hp
  - SB84C** Tractor range: 35–60 hp

- Three-point hitch: Cat 1 on SB54S and SB64S, Cat 1 and 2 on SB74C and SB84C (all models are ASAE quick-hitch compatible)
- Designed specifically for subcompact and compact tractors
- Move large amounts of snow in a short time with working widths from 54- to 84-inches
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design
- Reinforced steel side plates offer exceptional durability
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator

### Heavy Duty

- Models**
- SS84-2** Tractor range: 60–80 hp
  - SS96-2** Tractor range: 80–150 hp
  - SS108-2** Tractor range: 125–175 hp

- Three-point hitch: Cat 2 and 3
- These heavy-duty snow blowers have plenty of room to tackle the big storms with working widths from 84- to 108-inches, and up to a 38-inch working height
- Adjustments are a breeze with the 200-degree hydraulic chute rotation (standard on every SS model)
- Ensure faster, easier and safer hook-ups with ASAE quick-hitch compatibility
- Double your snow throwing power with two feeder augers on the SS96-2 and SS108-2 models

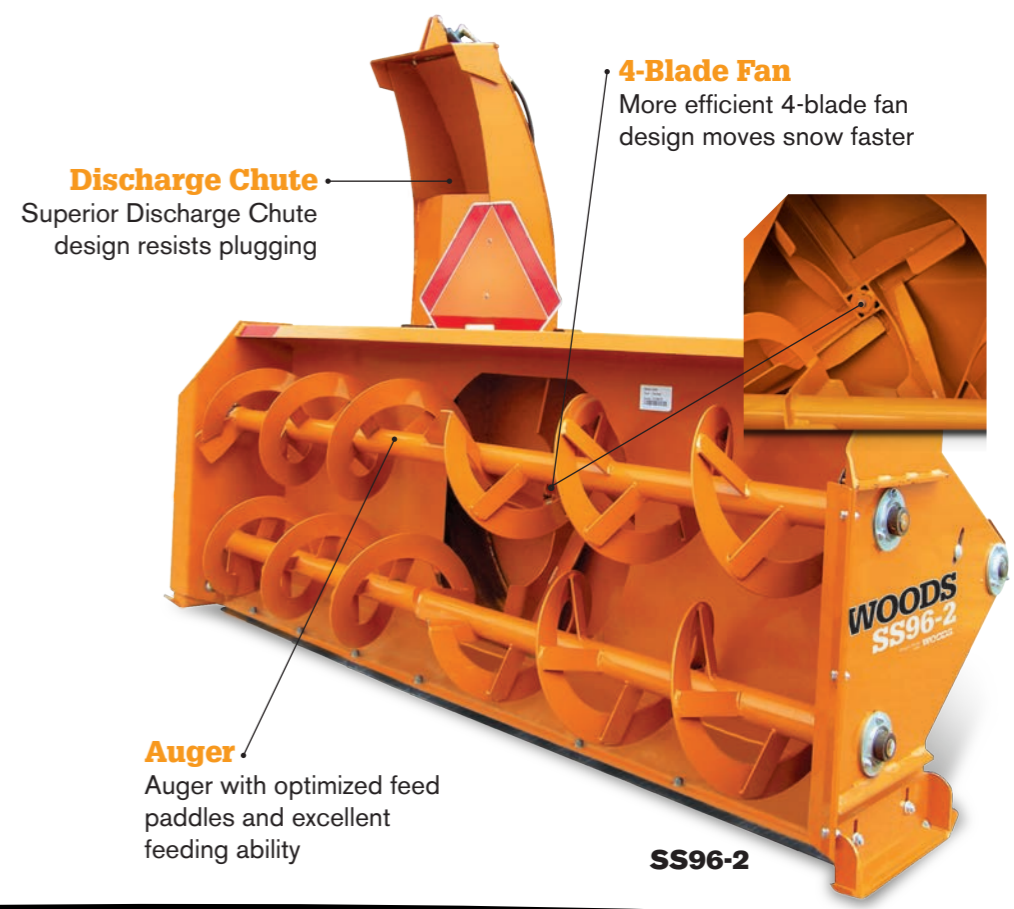

SS96-2

Specifications	SB54S	SB64S	SB74C	SB84C	SS84-2	SS96-2	SS108-2
<b>PTO Horsepower</b>	15–25	15–35	30–50	35–60	60–80	80–150	125–175
<b>Tractor PTO Speed</b>	540 RPM					540/1000 RPM	
<b>Hitch</b> (All models are ASAE Quick Hitch Compatible)	Cat 1		Cat 1 & 2		Cat 2 & 3		
<b>Working Width</b>	54"	64"	74"	84"	84"	96"	108"
<b>Transport Width</b>	56"	66"	76"	86"	87.7"	99.7"	111.7"
<b>Working Height</b>	24"		26"		28"	38"	
<b>Approximate Weight</b>	415 lbs	436 lbs	592 lbs	632 lbs	1,210 lbs	1,420 lbs	1,741 lbs
<b>Driveline</b>	Cat 3				Cat 4		
<b>Driveline Protection</b>	shear bolt						
<b>Drive Type–Fan</b>	gearbox						
<b>Drive Type–Auger</b>	gearbox & chain						
<b>Number of Feeder Augers</b>	1					2	
<b>Auger Flighting</b>	.313" x 2"				.313" x 3"		
<b>Chute Rotation</b>	270°				200°, hydraulic		
<b>Hydraulic Chute Rotator</b>	optional				standard		
<b>Fan Diameter</b>	22"		24"		34"		
<b>Fan Depth</b>	6"		8"		9"		
<b>Replaceable Skids</b>	yes						
<b>Adjustable Skids</b>	yes						
<b>Replaceable Cutting Edge</b>	no				yes		
<b>Telescoping 3-Point Hitch</b>	no				yes		
	Standard Duty				Heavy Duty		

**WOODS®** | A Blount International Brand

2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2012 Woods Equipment Company. All rights reserved. WOODS, and the Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

**WOODS®**  
A Blount International Brand

**B121101** Revised NOV 2016